

VIASOL PERM DECK^{FF}




Slip resistant, water-vapour permeable epoxy advanced resin based coating system, low odour, low emission, hard-wearing, water-proof surface with good mechanical and chemical properties and a wide colour spectrum. According to DIN EN 1504-2 and DIN V 18026, class OS8.

Application fields

- Public buildings
- Paper mills and metal working industry
- Underground garages
- Workshops
- Production areas
- Areas with moisture sensitive substrates

System Build-up

- VIASOL PU-S6501P^{FF}
OPTIONAL UV SEALER
- VIASOL EP-S680^{FF}
OR OTHER
WEAR COAT
- VIASOL EP-L380^{FF}
SCRATCH COAT
- VIASOL EP-P285^{FF}
PRIMER

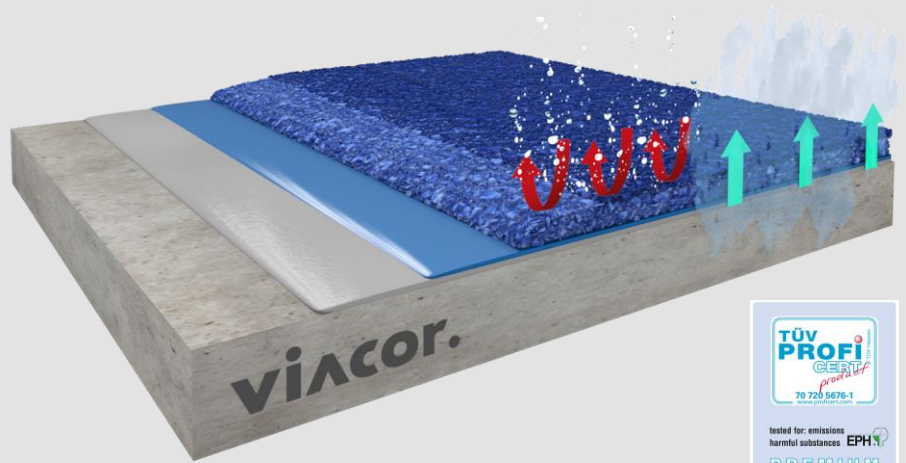

System highlights

0.5 - 2.5 mm System thickness



High water vapour permeable, no blistering due to hydrostatical pressure



Seamless, liquid-tight



Slip resistant



Low emission after AgBB standards



Low odor



High abrasion resistance



High impact resistance



Good chemical resistance



OS 8
EN 1504-2
DIN V 18026

System pictures



VIASOL PERM DECK^{FF}



Application and Consumption

SUBSTRATE REQUIREMENT

Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength $\geq 1.5 \text{ N/mm}^2$, this system is water vapour permeable, max. residual moisture $< 6 - 8\% \text{ CM}$, for magnesite screed $< 10\% \text{ CM}$, anhydrite max. $1\% \text{ residual moisture}$, attention for underfloor-heating $< 0.3\% \text{ CM}$, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane should be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.

Technical Data

	property	standard	result
	Adhesive strength at T_{NORM}	DIN EN 1542	$\geq 4,3 \text{ N/mm}^2 (\geq 2,0 \text{ N/mm}^2)$
	Adhesive strength after freeze-thaw with de-icing salt	DIN EN 13687-1 and -2	$\geq 4,3 \text{ N/mm}^2 (\geq 2,0 \text{ N/mm}^2)$
	Dynamic crack bridging (-20°C)	DIN EN 1062-7	NPD
	Grip and slip resistant	DIN EN 13036-4 DIN 51130	60 Skt ($\geq 55 \text{ Skt}$) R11-V4 and R12-V6
	Chemical resistance	DIN EN 13529	Test liquids DiBT Nr. 1, 3, 10
	Abrasion resistance (H22 wheel)	DIN EN ISO 5470-1	1.903 mg /1000 U (≤ 3.000)
	Carbon dioxide permeability	DIN EN 1062-6	Class III $> 2.500 \text{ m} (> 50 \text{ m})$
	Water vapour permeability	DIN EN ISO 7783-1 and -2	Class I $> 4 \text{ m} (< 5 \text{ m})$
	Water absorption coefficient	DIEN EN 1062-3	$< 0,01 \text{ kg/m}^2 \times h_{0,5} (< 0,1)$
	Impact resistance	DIN EN ISO 6772-2	4 Nm – no cracks
	Low emission	AgBB and M1	Fulfilled after 3 days
	Fire Resistance	EN 13501-1	Bfl-S1

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all FLOORFINDER data sheets are updated on a regular basis it is the user's responsibility to obtain the most recent issue (see www.floorfinder.com.my or contact us directly) – all technical information is subject to change without prior notice. FLOORFINDER products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies which can be obtained on request.

Manufacturer:

FLOORFINDER ASIA SDN. BHD. – A division of VIACOR Polimer GmbH | No. 28, Lorong Sungai Puloh 1A/KU6 | Jalan Sungai Puloh | Batu 5 3/4 Kapar | 42100 Klang | Selangor Darul Ehsan | Malaysia | Tel: +603 3290 7644 | info@floorfinder.com.my | www.floorfinder.com.my
Seite 2/2 Version Nr. 2 Stand: 07-2022